



BLOCKSYSTEM

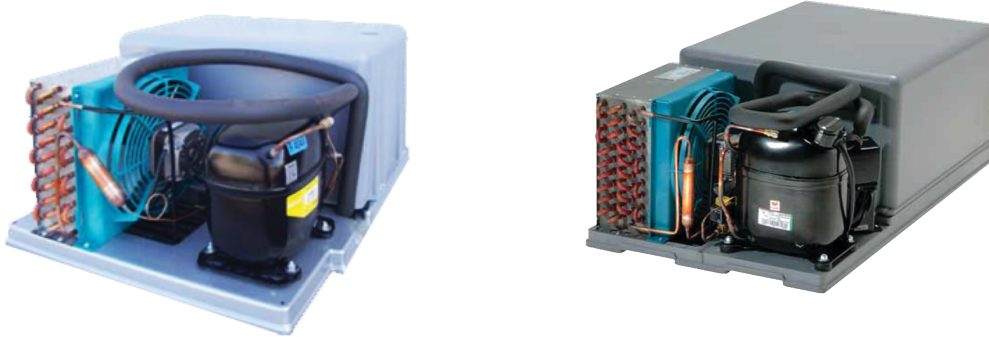

PACKAGED UNITS FOR REFRIGERATED CABINETS

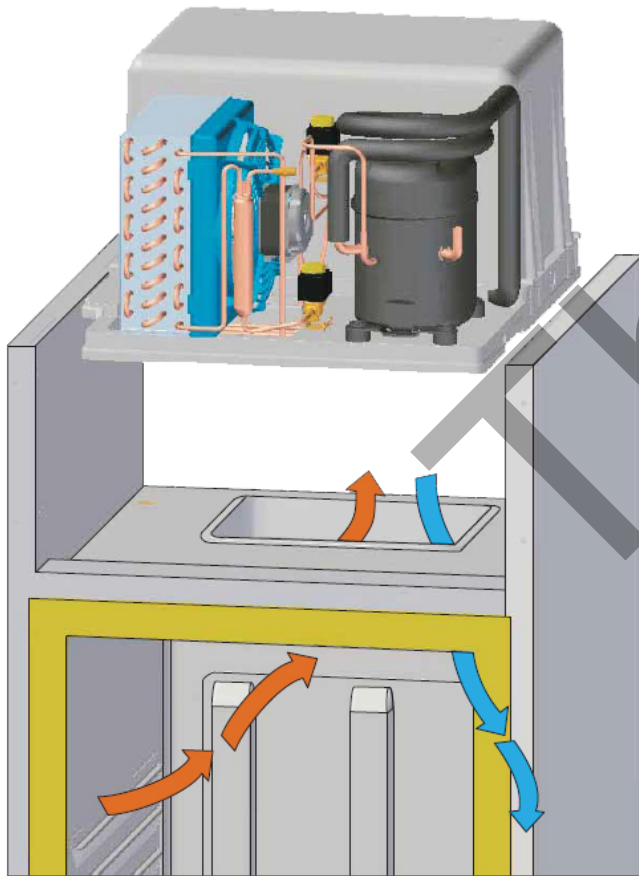

UPRIGHT TECHNICAL DATA

DESCRIPTION	R 2 C	R 2 F	R 4 C	R 4 F
Refrigerating Block System Italy	SDH007Z	SDL007Z	SDH014Z	SDL014Z
Temperature Range	0 °C to 8 °C	-15°C to -18°C	0 °C to 8 °C	-15°C to -18°C
Controller : Microprocessor	Digital display	Digital display	Digital display	Digital display
Refrigerant	R404 a	R404 a	R404 a	R404 a

STANDARD FEATURES

Dimension L x D x H (mms)	680x800x2050	680x800x2050	1320x800x2050	1320x800x2050
Capacity(Lits)	820	820	1800	1800
Number Door	2	2	4	4
Insulation : PU Foamed-In-Place	PU. Thick 60 mm	PU. Thick 60 mm	PU. Thick 60 mm	PU. Thick 60 mm
Finish : Exterior / Interior	S/S 430#22 / SS 304#22	S/S 430#22 / SS 304#22	S/S 430#22 / SS 304#22	S/S 430#22 / SS 304#22
Drainage	Evaporative no drain	Evaporative no drain	Evaporative no drain	Evaporative no drain
Shelves : PVC coated	4	4	8	8
Power Supply	220/1/50	220/1/50	220/1/50	220/1/50

TECHNICAL DATA

DESCRIPTION	R 2 FC	R 4 FC	R 4 FCS
Refrigerating Block System Italy	SDL007Z	SDL007Z	SDL014Z
Temperature Range Up	-15°C to -18°C	-15°C to -18°C	-15°C to -18°C
Temperature Range Below	2°C to 8°C	2°C to 8°C	2°C to 8°C
Temperature Range Right			-15°C to -18°C
Temperature Range Left			2°C to 8°C
Controller : Microprocessor	Digital display	Digital display	Digital display
Refrigerant	R404 a	R404 a	R404 a

STANDARD FEATURES

Dimension L x D x H (mms)	680x800x2050	1320x800x2050	1320x800x2050
Capacity(Lits)	820	1640	1580
Number Door	2	4	2
Insulation : PU Foamed-In-Place	PU. Thick 60 mm	PU. Thick 60 mm	PU. Thick 60 mm
Finish : Exterior / Interior	S/S 430#22 / SS 304#22	S/S 430#22 / SS 304#22	S/S 430#22 / SS 304#22
Drainage	Evaporative no drain	Evaporative no drain	Evaporative no drain
Shelves : PVC coated	4	8	8
Power Supply	220/1/50	220/1/50	220/1/50



COMPANY LIMITED. (662)372-1532-4 , 955-9471-3 FAX (622) 955-9470

Add: 69 M.3 T. Bungkasam A. Nongsua Phatumthani 12170 Thailand